






OCTOPLUS





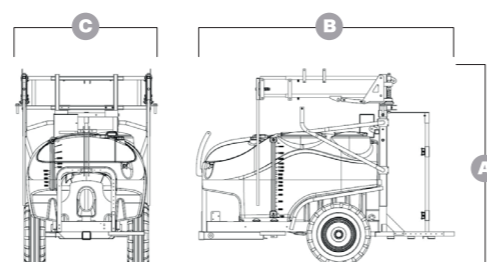

-  Nebulizador remolcado para el tratamiento de cuatro caras (dos filas).
-  Trailed mist blower for treatment for four faces (two rows).
-  Pulvérisateur pneumatique trainé pour le traitement de quatre faces (deux rangées).
-  Pneumatische Anhängespritzen für Behandlung in vier Gesichtern.

MOD.	LT	MOD.	KG	MM	MM	MM
UOP1500	1500	10.0 / 80 - 12 8 PR	1150	2600	3000	2150
UOP2000	2000	10.0 / 75 - 15 10 PR	1200	2800	3300	2200
UOP3000	3000	11.5 / 80 - 15.3 14 PR	1250	3000	3850	2450




SULFUR





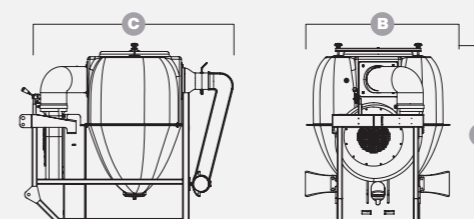

-  Espolvoreador suspendido.
-  Mounted sulphurater.
-  Poudreuse portée.
-  Anbaustäuber.

MOD.	KG	Nº	KG	MM	MM	MM
USF1602	160	2	130	1250	800	1400
USF1604	160	4	130	1450	1000	1400
USF4002	400	2	150	1400	1000	1500
USF4004	400	4	150	1600	1000	1500
USF400C1	400	1 CAÑON / CANON	150	1650	1250	1500
USF400C2	400	2 CAÑON / CANON	150	1650	1250	1500




SULFUR PLUS



-  Espolvoreador remolcado.
-  Trailed sulphurater.
-  Poudreuse trainé.
-  Anhängestäuber.

MOD.	KG	Nº	KG	MM	MM	MM
USU8002	800	2	510	1650	3000	1250

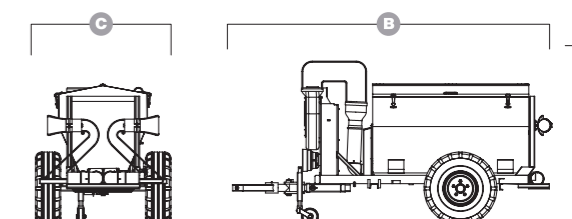

CARACTERISTICAS / FEATURES



Hélices especiales

Special blades

Diseñadas en sistema helicoidal para un bajo consumo y un mayor rendimiento para un tratamiento óptimo de serie en los modelos Hélix:

BSB – BSA – BSI – BSK

With helical design that enables a better efficiency and better output to allow a better product application. Standard on Helix:

BSB – BSA – BSI – BSK



Robot de limpieza

Cleaning robot

Máquinas suspendidas con robot de limpieza interior a partir de 500lt según normativa CE y máquinas remolcadas en todos los modelos.

Standard on all trailed sprayers and on mounted sprayers from 500lt tank and up, as per CE rules



Toberas envolventes en acero inoxidable

Stainless Steel exhaust piping

Para evitar la corrosión debido al contacto con el producto fitosanitario.

To avoid rust issues due to the contact with the fitosanitary product.



Depósitos en polietileno

Polyethylene tank

Depósito principal, auxiliar lavacircuito y lavamanos en polietileno especial de alta densidad.

The three of them: main, circuit cleaning and hand cleaning tanks are made of high density polyethylene.



Amplia gama de bombas disponibles

Wide range of pumps to choose from

Bombas de membrana o pistón de diferentes caudales para adaptarse a todas las necesidades.

Either membrane or pistons pumps available, with various rated flows, that match everyone's choice.



Chasis reforzados

Reinforced main chassis

Chasis pintados con pintura especial de poliéster al horno de serie o galvanizados en opción. Chasis galvanizados de serie en toda la gama Hélix.

Sprayed with baked polyester Paint as standard. Galvanised as an option. Helix lineup comes standard with galvanised chassis.



Mandos opcionales

Optional commandments

Electro-válvulas on-off con regulador en bomba, en cabina, sónar u ordenadores con control DPA disponibles.

On-off electro-valves, with pump-built-in or in-cabin pressure regulator, sonar or DPA computer available.